

# Fire Prevention Safety Fact Sheet

HS04-072E (06-24)

**F**ire can race through a structure in a matter of minutes, threatening the lives of those inside and leaving a devastating impact on businesses. From 2018-2022, the Bureau of Labor Statistics reported nearly 500 work-related deaths due to fires or explosions in the United States.<sup>1</sup>

These tips can help employers and employees avoid workplace fires or explosions:

- Avoid storing or stockpiling flammable materials, such as packaging materials or waste, both inside and outside of a business premises.
- Make sure all machinery is kept clean and properly serviced.
- If possible, turn machinery off when not in use or when the business is closed.
- Install a suitable fire alarm system -- such as a remotely serviced alarm system, sprinkler system, or thermal or smoke alarm -- and test and service the system routinely.
- If your business stores dangerous chemicals or materials, use and store them per federal, state, and local requirements.
- Make sure all employees and responsible parties are trained in your fire prevention, evacuation, and contingency plans.



## Fire Prevention Plans

Under the Occupational Safety and Health Administration's [29 Code of Federal Regulations 1910.39](#), employers must create a fire prevention plan. Employers with 10 or fewer employees may communicate the plans orally. Employers with 11 or more employees must have plans that are:

- Written.
- Kept in the workplace.
- Available for employees to review.

The plan must list:

- All major fire hazards on site.
- Proper handling and storage procedures for hazardous materials.
- Potential ignition sources and their control.
- Types of fire protection equipment needed to control each major hazard.

<sup>1</sup> U.S. Bureau of Labor Statistics, Occupational Injuries/ Illnesses and Fatal Injuries Profiles, by selected event or exposure [Fires and explosions 3XXXXX], all U.S., all ownerships, 2018-2022. Web database, <https://data.bls.gov/gqt/InitialPage>. Accessed June 11, 2024.

- Procedures for controlling buildup of flammable and combustible waste materials.
- Procedures for regularly inspecting, maintaining, and testing safeguards installed on heat-producing equipment to prevent accidental ignition of combustible materials.
- Job titles of employees responsible for maintaining equipment to prevent or control sources of ignition or fires.
- Job titles of employees responsible for controlling fuel-source hazards.

## Contingency Plans

Know the critical resources required for your organization to recover and resume operations after a fire.

- Create a contingency plan to protect and restore important hard-copy and electronic information, like supplier and client lists, business contracts, and insurance details.
- Include a designated, secure, off-site location for storing the information and a person who is responsible for maintaining and updating the information.



## Smoke Alarms


- Contact the local fire department to determine your building's fire alarm requirements.
- Install smoke alarms or smoke detectors on every level of a building, including the basement, ceilings, and high walls.
- Test smoke alarms and smoke detectors once a month according to the manufacturer's instructions.
- Replace batteries once a year or as soon as the smoke alarm or smoke detector chirps to indicate that the battery is low.
- Replace smoke alarms -- even those that are hard-wired or have long-life batteries -- every 10 years. Have a qualified electrician install hard-wired fire alarms.

## Evacuation Plans

Develop and practice a basic fire evacuation plan, so employees know what to do when an alarm sounds. Employers should involve as many people as practical in putting together the plan. As part of the plan, have employees:

- Study posted evacuation plans.
- Learn two ways out of each work area.
- Count the number of desks or workstations between their work area and the nearest two exits
- Designate people responsible for helping employees with temporary or permanent mobility limitations.
- Designate an outside meeting place where everyone can gather after they have evacuated.

# HOW TO USE A FIRE EXTINGUISHER

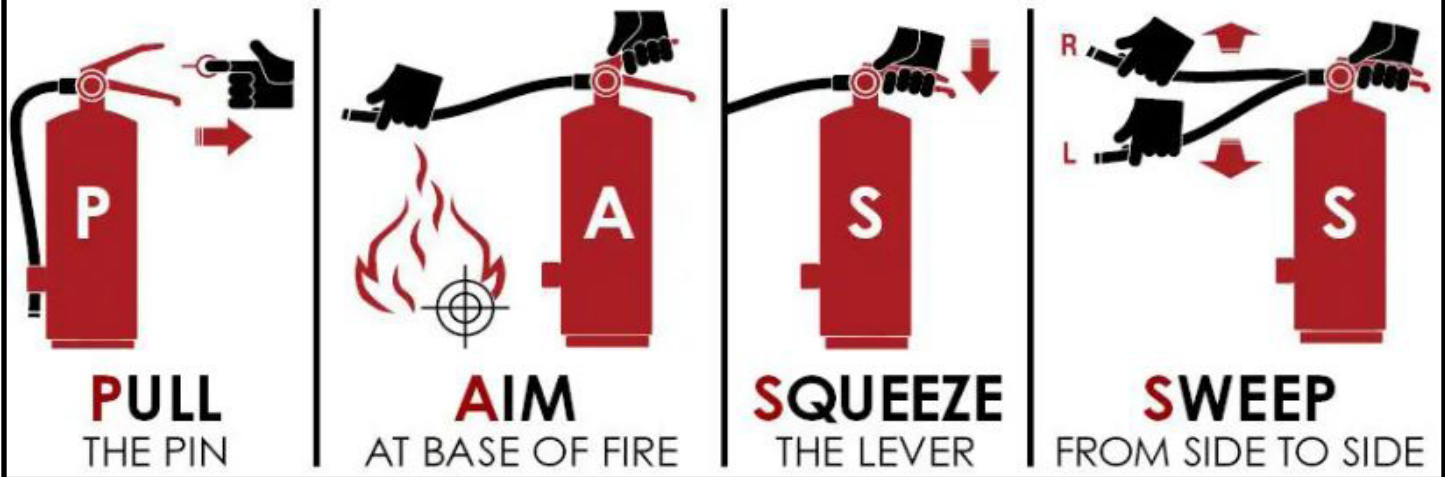

- Have a system to account for everyone in the building.
- Train employees when they are first hired and every year after.

Practice the evacuation plan at least twice a year.

## Fire Extinguishers

A portable fire extinguisher can quickly put out a small fire or control a larger one until the fire department arrives. If portable fire extinguishers are part of your business's emergency plan, provide the right type and an adequate number of extinguishers. Mount them in readily accessible locations, and regularly recharge and inspect them. Employees chosen and trained to use a fire extinguisher must:

- Know how to operate the extinguisher before a fire breaks out.
- Should only operate a fire extinguisher if they have a clear escape route and are comfortable handling the situation.
- Start using the extinguisher 6 to 8 feet away from the fire and then move closer as the fire shrinks.

To use a fire extinguisher, remember the word **"PASS"** while holding the extinguisher with the nozzle pointing away from you:

- **P**ull the pin.
- **A**im low, pointing the extinguisher at the base of the fire.
- **S**queeze the lever.
- **S**weep the nozzle from side to side.

## Fire Sprinkler Systems

Properties with fire sprinkler systems have a 32% lower civilian death rate and a 35% lower firefighter injury rate than properties without an extinguishing system.<sup>2</sup> To keep a sprinkler system effective:

- Check the system's control valves, air, and water pressure as required.
- Protect sprinkler heads with metal guards if exposed to potential physical damage.

<sup>2</sup> McGree, Tucker. The National Fire Protection Association, NFPA Research, "U.S. Experience with Sprinklers." Mar. 31, 2024. Web. <https://www.nfpa.org/education-and-research/research/nfpa-research/fire-statistical-reports/us-experience-with-sprinklers>. Accessed June 11, 2024.

- Maintain proper clearance below sprinkler heads.
- Assign the task of testing and maintaining the sprinklers to a sprinkler contractor or other qualified, designated person.

## Other Fire Suppression Systems

While automatic sprinkler systems work by spraying water toward detected heat and fire, other fixed fire suppression systems work by filling areas – like areas that have important electrical equipment – with a gas or chemical agent to quickly put out the fire. OSHA’s Fire Extinguishing Systems General Standard [29 CFR 1910.160](#) regulates any fixed system that could expose employees to injury, death, or negative health risks due to these extinguishing agents, regardless of why it was installed.

All employers with a fixed extinguishing system installed to meet a particular OSHA standard – except automatic sprinkler systems, which are covered by [29 CFR 1910.159](#) – must comply with the standard. (Systems installed in areas where employees are not potentially exposed to an extinguishing agent are exempt.)

The Fire Extinguishing Standard outlines requirements for the following specific types of extinguishing agents used:

- Dry chemicals, [29 CFR 1910.161](#).
- Gaseous agents, [29 CFR 1910.162](#).
- Water spray and foam. [29 CFR 1910.163](#).

Fixed fire extinguishing system components and agents must be designed and approved for use on the specific fire hazards they are expected to control or extinguish.



To keep employees safe when using automatic fire suppression systems – particularly the total flooding type that can reduce oxygen and create toxic atmospheres – employers must properly operate and regularly maintain and test the systems. Key requirements include:

- Inspect each system annually.
- Make sure systems are always turned on except during repairs or maintenance.
- Tell employees what measures to follow if the system breaks.
- Have defects fixed by trained personnel.
- Provide training and retraining as needed.
- Designate employees who inspect, maintain, operate, or repair the systems.

For areas protected by total flooding systems, which work by filling an enclosed space with carbon dioxide, Halon 1211, or other agents that pose a serious health hazard:

- Post warning signs at the entrances to these areas.
- Provide an emergency action plan per [29 CFR 1910.38](#) to give employees a safe way to evacuate.



[www.txsafetyatwork.com](http://www.txsafetyatwork.com)

**1-800-252-7031, Option 2**

*The Texas Department of Insurance,  
Division of Workers' Compensation (DWC)-Workplace Safety  
P.O. Box 12050  
Austin, TX 78711-2050*

---

Disclaimer: Unless otherwise noted, this document was produced by the Texas Department of Insurance, Division of Workers' Compensation using information from staff subject specialists, government entities, or other authoritative sources. Information contained in this fact sheet is considered accurate at the time of publication. For more free publications and other occupational safety and health resources, visit [www.txsafetyatwork.com](http://www.txsafetyatwork.com), call 800-252-7031, option 2, or email [resourcecenter@tdi.texas.gov](mailto:resourcecenter@tdi.texas.gov).